



# Tag

## Product Code: L-TG100


### Description: Tag - Domino

An internal lithium battery powers The Link-it™ series of Active Tags. The Domino Tag will, for the duration of its life, transmit a Radio Frequency (RF) signal at a pre-set time-interval. The Tag life is estimated at 5 years at a transmission time interval of approximately 1.5 seconds. The lifespan of the Tag ends when the battery life is exhausted. Battery status can be inferred by interrogating the internal Tag Age Counter Value.

The transmitted Tag data includes Customer Site Code (CSC), Tag ID, Tag Age Counter Value, Movement Alarm and Tamper Alarm status.

For protection against adverse environmental conditions, Link-it™ Tags are encapsulated in a moulded plastic case, which is ultrasonically sealed during the manufacturing process.

The Domino Tag is generally used for asset tagging. The mounting and affixing of a Tag depends on the type of application. The standard method is by VHB type double-sided adhesive tape.

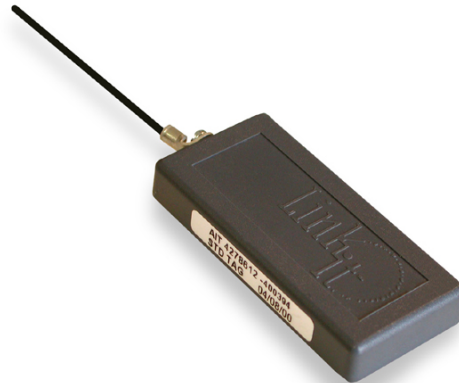

### Features:

- Configurable settings, including Site / Vendor ID, Tag ID, Transmission Repetition Interval and Alarm functions (these are programmed at order placement stage).
- Low power consumption. Tag life is estimated at 5 years when transmitting at a 1.5-second interval.
- A Collision avoidance algorithm is used to dispose the transmissions around the mean repetition interval.
- External Antennae.

### Applications:

Link-it™ Domino Tags can be mounted on a variety of non-metallic items. Where permanent fixing is required, VHB double-sided tape is used (L-TA400).





## Specification:

### Environmental

Operating temperature	- 10° C to + 60° C
Storage temperature	- 20° C to + 70° C
Humidity	5% to 90% (non condensing)

### Physical

Size	64 mm x 30 mm x 9 mm (Domino Enclosure)
Weight	15 grams (excluding antenna)
Colour	Grey (Clariant 04-600 2%)
Type of material	PVC (ultrasonically sealed) IP 65

### RF Specifications

Tx Frequency	433 Mhz
Field strength	< 1600 $\mu$ V/m
Typical Transmission Range	8 Meters (24 feet)
Modulation	ASK
Bandwidth	1 MHz
Stability	SAW stabilised

### Electrical Specifications

Power	Internally powered Lithium Battery
-------	------------------------------------

**Wavetrend (Pty) Ltd.**  
Wavetrend House  
Hammets Crossing Office Park  
Selbourne Rd  
Fourways  
Johannesburg  
South Africa  
Tel +27(11)462-2633  
Fax +27(11)462-6316



**Wavetrend Inc.**  
13912 NE 31<sup>st</sup> Place  
Bellevue  
USA

Tel +1-206-949-6394

[sales@wavetrend.net](mailto:sales@wavetrend.net)

**Wavetrend UK Ltd.**  
1<sup>st</sup> Floor, 7 Mallard Court,  
Mallard Way, Crewe Business Park, Crewe,  
Cheshire  
England  
CW1 6ZQ

Tel +44-1270-214-433  
Fax +44-1270-214-420

